

Redefining Frequency Synthesizers

With QuickSyn Technology



Frequency Coverage **50 to 67 GHz**

Fast Switching **100 μ s**

Instrument-Grade Spectral Purity

(10 kHz phase noise: -100 dBc / Hz @ 67 GHz)
(100 kHz phase noise: -103 dBc / Hz @ 67 GHz)

+17 dBm Output Power

Frequency Sweep & List Mode

USB & SPI Control Interfaces

Compact Size **4 x 4 x 1.8 inches**

Models

PRELIMINARY

ni-microwavecomponents.com

SPECIFICATIONS

ORDER INFORMATION

Description	Specification
Model No.	Preliminary
Description	50 to 67 GHz mm-Wave Source

FREQUENCY

Description	Specification
Range	50 to 67 GHz

POWER

Description	Specification
Output	+17 dBm Typ.

SPECTRAL PURITY

Description	Specification
Output Return Loss	10 dB
Harmonics	-40 dBc Typ.
Spurious	-60 dBc Typ.
Phase Noise (dBc / Hz) at 67 GHz Typ.	
1 kHz	-88 dBc
10 kHz	-100 dBc
100 kHz	-103 dBc
1 MHz	-103 dBc
10 MHz	-117 dBc
Floor	-135 dBc

REFERENCE

Description	Specification
Internal	
Output Frequency	10 MHz Nom.
Output Power	+5 dBm $\pm$ 2 dBm
Ref. Mute	-60 dBm Max.
Frequency Stability	$\pm$ 1 ppm
Aging	$\pm$ 1 ppm / year
Locking Range	$\pm$ 5 ppm
Output Impedance	50 ohms

External

Input Frequency	10 MHz
Input Power	+5 dBm $\pm$ 10 dBm
Absolute Max. Input Level	+15 dBm
Input Impedance	50 ohms

ELECTRICAL


Description	Specification
Supply Voltage	+12 V $\pm$ 5%
Absolute Max. Supply Voltage	+15 V
Supply Current	1250 mA

ENVIRONMENTAL

Description	Specification
Operating Temp. Range	0° to +50° C

MECHANICAL

Description	Specification
Size	4 x 4 x 1.8 in.
RF Out Connector	V type
REF IN & OUT Connectors	SMA type
DC Connectors	SPI Harness

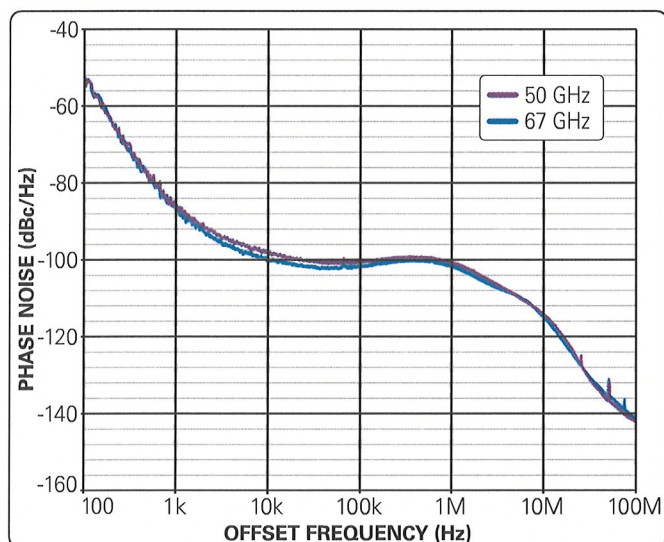

ni-microwavecomponents.com