



Phase Matrix, Inc.[®]
A National Instruments Company

QuickSyn[®] Lite

MICROWAVE FREQUENCY SYNTHESIZER

Model FSL-0010



Features

- 0.65 to 10 GHz coverage
- 0.001 Hz resolution
- 100 μ s frequency switching
- Instrument-grade spectral purity
- Frequency sweep & list mode
- USB & SPI control interface
- Compact size (4 x 4 x 0.8 in.)

QuickSyn[®] Lite

MICROWAVE FREQUENCY SYNTHESIZER


Model FSL-0010

Specifications and ordering information subject to change without notice.

Specifications

FREQUENCY

DESCRIPTION	SPECIFICATION			
Frequency Range ①	0.65 to 10 GHz			
Frequency Resolution	0.001 Hz			
Frequency Stability	Same as reference			
Frequency Accuracy	Reference \pm 1 ppb			
Frequency Switching Time ②	100 μ s (<i>triggered list mode</i>) 200 μ s (<i>individual SPI commands</i>)			
List Mode	32,000 points			
Power	+15 dBm min.		+18 dBm typ.	
RF Output On/Off Ratio	> 60 dB min.		< 75 dB typ.	
Output Return Loss	-10 dB nom.			
Harmonics	-12 dBc typ.			
Non-Harmonic Spurious	-70 dBc typ.		-60 dBc max.	
Phase Noise dBc / Hz	0.65 GHz typ (max.)	1 GHz typ (max.)	5 GHz typ (max.)	10 GHz typ (max.)
100 Hz	-83 (-77)	-80 (-74)	-66 (-60)	-60 (-54)
1 kHz	-126 (-120)	-124 (-118)	-110 (-104)	-104 (-98)
10 kHz	-138 (-132)	-136 (-130)	-123 (-117)	-117 (-111)
100 kHz	-138 (-132)	-136 (-130)	-123 (-117)	-117 (-111)
1 MHz	-138 (-132)	-136 (-130)	-123 (-117)	-117 (-111)
Floor	-155 (-149)	-153 (-147)	-150 (-144)	-147 (-141)

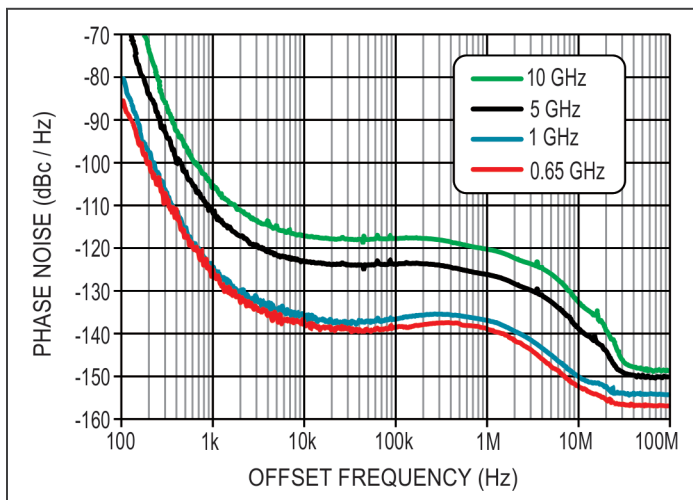

Phase Noise

REFERENCE

DESCRIPTION	SPECIFICATION	
Internal Reference		
Output Frequency	10 MHz nom.	
Output Power	+5 \pm 2 dBm	
Reference Mute	-60 dBm max.	
Frequency Temp. Stability	\pm 1 ppm	
Aging ③	\pm 1 ppm / year	
Locking Range	\pm 5 ppm	
Output Impedance	50 Ω nom.	
External Reference		
Input Frequency	10 MHz	
Input Power	+5 \pm 10 dBm	
Absolute Max. Input Level	+15 dBm	
Input Impedance	50 Ω nom.	

ELECTRICAL

DESCRIPTION	SPECIFICATION	
Supply Voltage	+12 V DC \pm 5%	
Absolute Max. Supply Voltage	+15 V DC	
Power Consumption	11 W nom.	

GENERAL & ENVIRONMENTAL SPECIFICATIONS

DESCRIPTION	SPECIFICATION	
Temperature Range ④	0° to +50° C (<i>operating</i>) -40° to +70° C (<i>non-operating</i>)	
Warm-up Time	1 minute	
Certifications		
CE Compliance	EMC Directive 2004/1008/EC Low Voltage Directive 2006/95/EC	
Safety	EN/IEC 61010-1	
EMC	EN 55011, EN/IEC 61326-1	
FCC/IC	FCC 15B/ICES-003 CLASS A	

MECHANICAL SPECIFICATIONS

Size (W x L x H)	4 x 4 x 0.8 in. (10.2 x 10.2 x 2 cm)	
Weight	0.8 lb. (0.36 kg)	

QuickSyn[®] Lite

MICROWAVE FREQUENCY SYNTHESIZER

Model FSL-0010

Specifications (continued)

SPI INTERFACE

SIGNAL	PIN	DESCRIPTION
SPI_CLK	20	SPI clock. Supplied by the controlling computer (not the synthesizer). The controlling computer is the SPI master; the synthesizer is the SPI slave.
SPI_SS	18	SPI Slave Select. This signal is an active low input to the synthesizer. It frames command communications. For each command, SPI_SS goes low before the first bit is sent and goes high after the last bit is sent.
SPI_MISO	24	Master In/Slave Out. Status and other returned information from the synthesizer to the controlling computer.
SPI_MOSI	22	Master Out/Slave In. Command data from the controlling computer to the synthesizer.
TRIGGER	14	Rising edge active input. When enabled, the trigger signal of +3.3 V can initiate freq. change or step through lists or sweeps.
LOCK	16	Output indicates the synthesizer is locked on its current setting (+3.3 V locked, 0 V unlocked).
REF_LOCK	13	Output indicates the synthesizer has detected an external or internal reference signal and locked on that signal (+3.3 V locked, 0 V unlocked).
RESET	1	Internally pulled up to +3.3 V with 100 k Ω resistor. Active "low" signal, which has a minimum width of 1 ms, will reset the synthesizer to a default state.
PWR_+12V	26, 28, 30	External +12V DC supply.
GND	2, 15, 25, 27, 29	Ground.
N/C	3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 17, 19, 21, 23	Do not use. Reserved for factory use.

Notes:

- ① Tested to 10.4 GHz.
- ② Full band step to ± 5 ppm of final frequency.
- ③ Self calibration with USB command is available for in-field calibration.
- ④ Adequate heat sinking must be provided in order to prevent permanent damage.
- ⑤ Phase Matrix recommends Samtec manufactured mating socket assembly SFSD-15-28-G-XXX series.
- ⑥ "Typ." means approximately 2/3 of all units meet these characteristics at room temperature. Characteristics identified by typ. and nom. are by design and are not normally verified on every unit during production.
- ⑦ Communication specifications are available from the Phase Matrix website (www.phasematrix.com)

Warranty

Phase Matrix, Inc. has a proven commitment to quality and reliability in instrumentation. This commitment is demonstrated in the QuickSyn[®] series of synthesizers with a full one-year standard warranty. Parts, labor, and even shipping are all included at no cost to you.